

MODEL # L-011-S

Construction: All brass components, 1/8" thick brass housing, 3/8" schedule 40 brass stem.

Lens: Tempered glass, stepped to prevent "pooling" of water on lens.

Mounting: 1/2" male thread. 16" stem height is standard 8", 12", and 20" stem height also available. Mounts into standard J-box or:
 GS-1 Standard ground spike
 GS-2 Heavy duty ground spike

Finish: Unfinished. Fixture will weather to a natural patina finish.


Accessory: BGS-1 Brass glare shield.
 HL-1 Honeycomb louver.

Voltage: 12 volts.

Lamp: MR-16 bi-pin halogen, 50 watt maximum. Lamp is recessed in fixture to reduce glare.

JR-10	10 watt medium	(24 degrees)
ESX	20 watt spot	(12 degrees)
BBF	20 watt medium	(24 degrees)
BAB	20 watt flood	(36 degrees)
FMT	35 watt spot	(12 degrees)
FMV	35 watt medium	(24 degrees)
FMW	35 watt flood	(36 degrees)
EXT	50 watt spot	(12 degrees)
EXZ	50 watt medium	(24 degrees)
EXN	50 watt flood	(36 degrees)

See separate MR-16 lamp sheet for data.

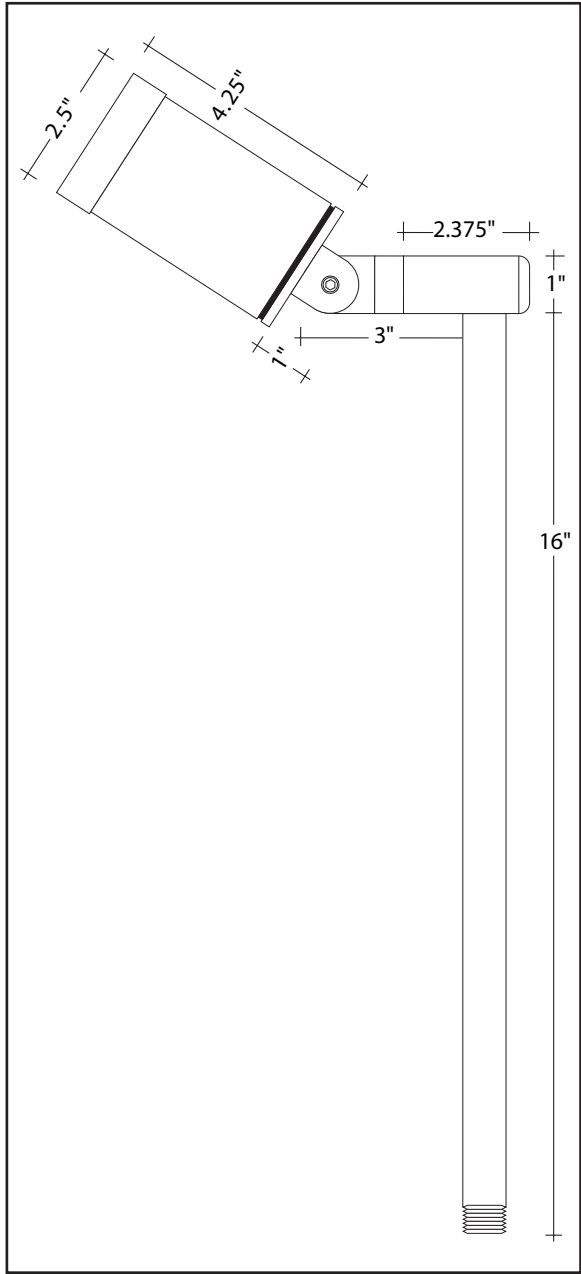

Ordering Example

L - 0 1 1 - S — 1 6 — B A B — G S - 2 — B G S - 1 — H L - 1

Fixture Model Stem Height Lamp Type Mounting Accessory Other Accessories



Seashore Lighting • 941-753-0349 • www.SeashoreLighting.com