
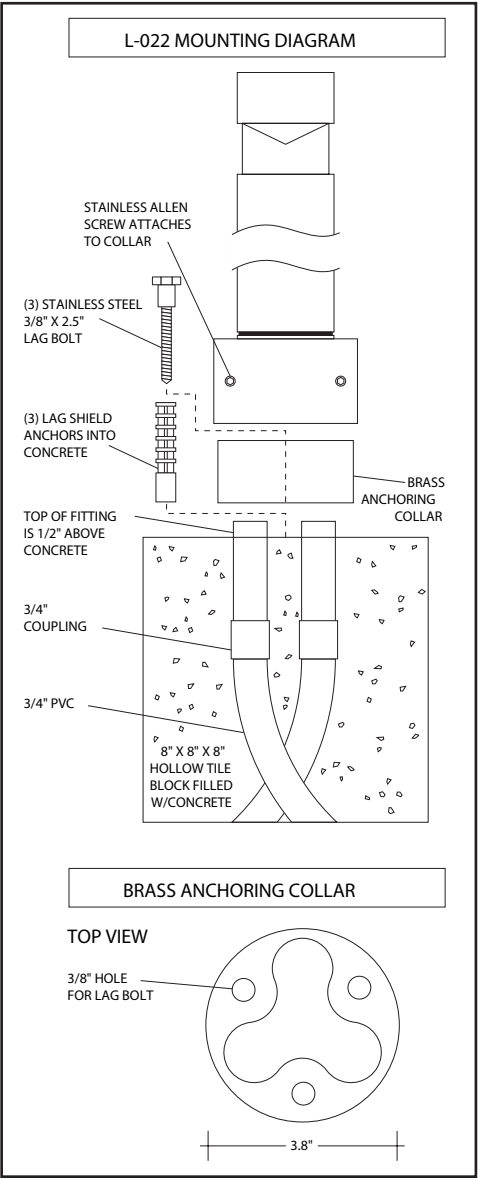


MODEL # L-022

- Construction: All brass components, 1/8" thick brass housing.
- Lens: Borosilicate frosted glass (1/4" thick).
- Mounting: Concrete installation onto standard 8" cube concrete block.
- Finish: Unfinished. Fixture will weather to a natural patina finish.
- Voltage: 12 volts.
- Accessory: HS-1 Half shield for 180 degree illumination.
- Lamp: MR-16 bi-pin halogen, 50 watt maximum. A honeycomb louver is in fixture to reduce glare.
- JR-10 10 watts
- ESX 20 watts
- FMT 35 watts
- EXT 50 watts

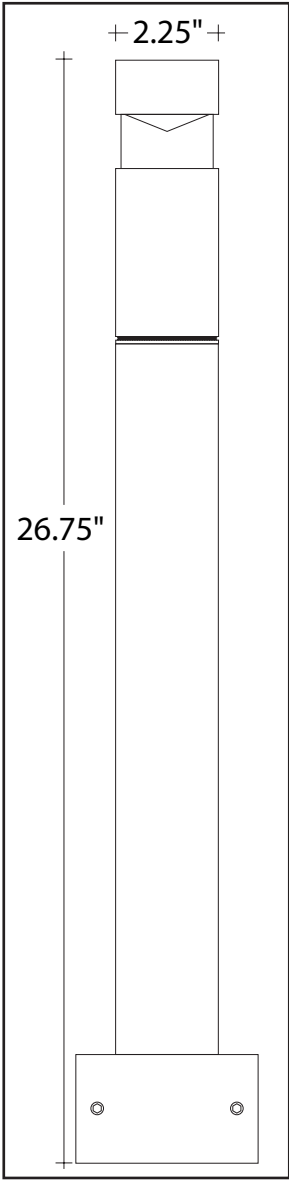

Horizontal footcandles at radius from fixture

Lamp:	1'	2'	3'	4'	5'	6'	7'	8'
JR-10	1.2	1.7	1.4	1.0	.8	.5	.3	.2
ESX	1.5	1.8	1.6	1.2	.9	.7	.4	.3
FMT	1.9	2.1	1.9	1.7	1.2	1.0	.7	.6
EXT	2.4	3.0	2.4	2.1	1.7	1.4	1.0	.8

Ordering Example

L-022 — ESX — HS-1
 Fixture Model Lamp Type Accessory

